



# Underwater Engineering Services

**20T HYDRAULIC SHACKLE**


**MODEL: HS20**

## General Description

The 20 ton Hydraulic Shackle is a convenient way of attaching a shackle to underwater rigging remotely or with the aid of a ROV. The shackle is the size of a 35 ton shackle with a hydraulic cylinder to insert and retract the shackle pin.

## Technical Specification

<b>SWL:</b>	<b>20 t</b>
<b>(Shackle Size:</b>	<b>35t)</b>
<b>Flow:</b>	<b>0.5-10 l/min</b>
<b>Cylinder Vol.:</b>	<b>120 cc</b>
<b>Pressure:</b>	<b>200 bar</b>
<b>Weight:</b>	<b>33 kg</b>
<b>Length Open:</b>	<b>73cm</b>
<b>Length Closed:</b>	<b>58cm</b>
<b>Width:</b>	<b>13cm</b>
<b>Height:</b>	<b>35cm</b>
<b>Porting:</b>	<b>1/4" BSP</b>

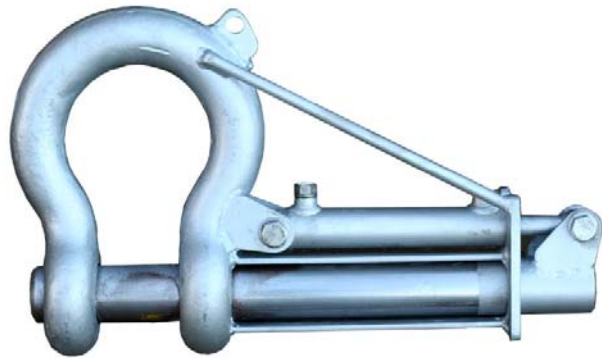

Tools supplied as standard with 3/8 Pioneer Q.D. Couplings.



**Underwater Engineering Services**  
**West Pitmillan**  
**Foveran**  
**Ellon**  
**Aberdeenshire AB41 6AL**

**Tel:** +44 (0) 1358 789 808  
**Fax:** +44 (0) 1358 789 575  
**Email:** [info@uesltd.net](mailto:info@uesltd.net)  
**Web:** [www.uesltd.net](http://www.uesltd.net)